




Oilless Air-Cooled Reciprocating Compressor



Fu Sheng oilless air-cooled reciprocating compressor specification:


Specification	Motor Required	Revolutions per Minute	Piston Displacement		Working Pressure	Air Receiver		
			l /min.	cfm.		Diameter mm	Length mm	Volume mm
FVA-30	3	550	600	21.2	7	φ 350	1160	105
FVA-50	5	860	942	33.3	7	φ 390	1410	155
FVA-75	7 1/2	700	1187	41.9	7	φ 485	1440	245
FVA-100	10	900	1527	53.9	7	φ 485	1770	304
FTA-150	15	900	2290	80.8	7	φ 485	1770	304
HTF-75	7.5	700	826	29.2	12.5	φ 450	1555	220
HTF-100	10	800	944	33.3	12.5	φ 450	1555	220

- Please contact us for other spec. and working pressure.
- The specifications are subject to change without notification.

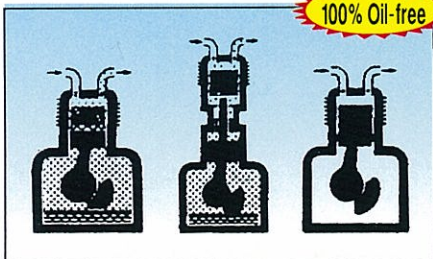

100% Oil-free

- ⊙ 100% clean and oil-free compressed air.
- ⊙ Ideal for applications and environments that require clean and oil-free air such as food processing plants, labs, pharmaceutical manufacturing facilities, hospitals, and computer industry.
- ⊙ Highly mobile and compact, suitable for all kinds of applications and facilities. Silent and interlock control models are available upon request.

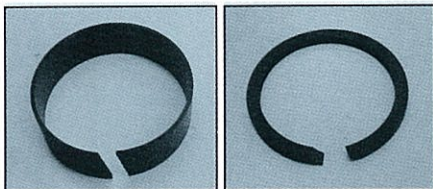

- ⊙ Compression and guide rings are capable of tolerating wear, high temperature, and abrasion.

701F-0208-E1

FU SHENG INDUSTRIAL CO., LTD.

NO. 60, KWANG FU ROAD, SEC. 2, SANCHUNG CITY,
TAIPEI COUNTY, TAIWAN
TEL : 886-2-2995-1411 FAX : 886-2-2995-7925
WEB SITE : www.fusheng.com
E-MAIL : machinery@m.fusheng.com.tw